



250W STANDARD SWITCHING POWER SUPPLY DOUBLE OUTPUT



(Dimension)

L:225 mm

W:62 mm

H:31.5mm

Weight: 0.42Kg

■Applications

- .Industrial automation machinery
- .Mechanical,electrical equipment
- .LED slim lighting equipment
- .IT communication equipment
- .Aging equipment

■Features

- Over-load,Over-temp. protection
- cooling by free air convection
- LED power indicator
- 100% full load burn-in test
- No-load consumption <0.7W
- Withstand 300VAC surge input for 5 seconds
- Working temperature up to 60°C
- 5G vibration tested
- High efficiency,long life,high reliability
- 2 years warranty




Specifications

Product No.		SLC-250-12	SLC-250-24			
Output	DC voltage	12V	24V			
	Rated Current	20.8A	10.4A			
	Current Range	0-20.8A	0-10.4A			
	Rated Power	250W	250W			
	Ripple and Noise(Max)Note.2	150mVp-p	240mVp-p			
	Voltage adjustment	10.8-13.2V	22-27.6V			
	Voltage tolerance Note3	±1%	±1%			
	Linear Regulation Note4	±0.5%	±0.5%			
	Load Regulation Note5	±0.5%	±0.5%			
	Setup and rise time	1000ms,30ms/230VAC 1000ms,				
Hold up time (Typ)	50ms/230VAC					
Input	Voltage range	AC 230±15%				
	Frequency range	50HZ/60HZ				
	Efficiency (Typ)	80%	81%			
	AC current (Typ)	2.1A/220V				
	Surge (Inrush) current (Typ)	Cold start: 65A/230VAC				
	Leakage Current	<2mA/240VAC				
Protection	Overload	>105% rated output power				
		Protection type: Hiccup mode, recovers automatically after fault condition is removed				
	Over temperature	Overheat protection starts when temperature in transistor over 140°C				
	Recovers automatically after temperature is normal.					
Environment	Working temp.	-20~+50°C (Please refer to the attenuation curve)				
	Working humidity	20~90% RH, Non-condensing				
	Storage temp & hmdty	-40~+80°C				
	Temp. coefficient	±0.03%/°C (0~50°C)				
	Vibration proof	10~500HZ,5G 10min/1 cycle, period for 60min, each along X、Y、Z axes				
Safety reg. & EMC (Note.6)	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)				
	Voltage proof	I/P-O:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
	Isolation resistance	I/P-O/P, I/P-FG,O/P-FG:100M Ohms/500VDC/25°C /70% RH				
	EMC irradiation	EN 55022A:2006;EN61000-3-2:1995+A2:2005				
	EMC disturbance proof	EN 61000-3-2:2006;				
Others	Dimensions	225*62*31.5(L*W*H)				
	Packing	0.42kg/PCS;30PCS/12.6kg				
Remark	<p>1. Unless specially indicated, all data are taken under 230VAC input, rated load and 25°C environment temp.</p> <p>2.Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1μF and a 47 μF capacitor on 20MHz bandwidth.</p> <p>3.Tolerance(Accuracy): including preset errors, linear adjustment rate and load adjustment rate.</p> <p>4.Linear adjustment: taken under rated load from low voltage to high voltage.</p> <p>5.Load adjustment: taken under 0~100% of rated load.</p> <p>6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments for EMC.</p>					

250W STANDARD SWITCHING POWER SUPPLY SINGLE OUTPUT


Appearance

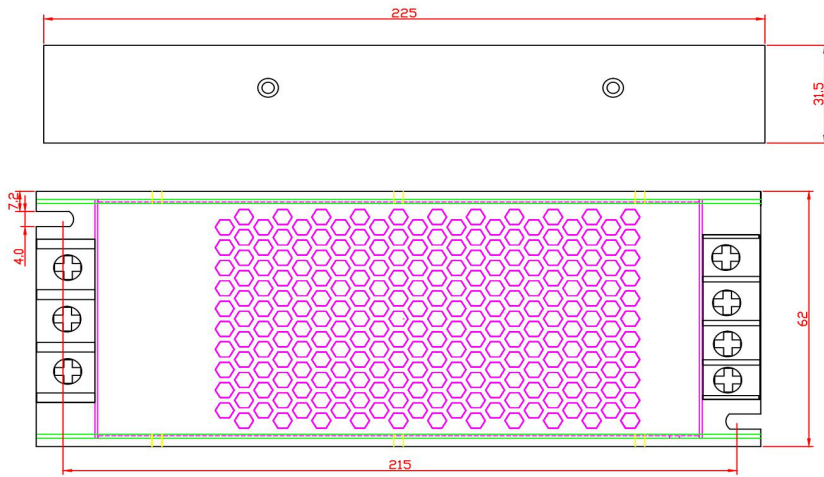


Definitionn the pin of the terminal

Pin number	Pin function
1	OUTPUT-
2	OUTPUT-
3	OUTPUT+
4	OUTPUT+
1	FG
2	AC/N
3	AC/L

Frame diagram

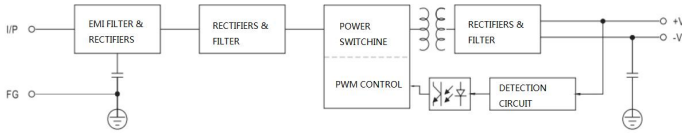

Derating curve



Static Characteristics

