



36W STANDARD SWITCHING POWER SUPPLY SINGLE OUTPUT



(Dimension)

L:115 mm

W:40 mm

H:25mm

Weight: 0.14Kg



■Applications

- .Industrial automation machinery
- .Mechanical,electrical equipment
- .LED slim lighting equipment
- .IT communication equipment
- .Aging equipment

■Features


- .Over-load,Over-temp. protection
- .cooling by free air convection
- .LED power indicator
- .100% full load burn-in test
- .No-load consumption <0.7W
- .Withstand 300VAC surge input for 5 seconds
- .Working temperature up to 60℃
- .5G vibration tested
- .High efficiency,long life,high reliability
- .2 years warranty

Specifications

Product No.		SLC-36-12	SLC-36-24				
Output	DC voltage	12V	24V				
	Rated Current	3A	1.5A				
	Current Range	0-2.1A	0-1A				
	Rated Power	36W	36W				
	Ripple and Noise(Max)Note.2	150mVp-p	240mVp-p				
	Voltage adjustment	10.8-13.2V	22-27.6V				
	Voltage tolerance Note3	±1%	±1%				
	Linear Regulation Note4	±0.5%	±0.5%				
	Load Regulation Note5	±0.5%	±0.5%				
Setup and rise time	1000ms,30ms/230VAC 1000ms,30ms/110V						
Hold up time (Typ)	50ms/230VAC 10ms/115AC						
Input	Voltage range	100-240VAC					
	Frequency range	47-63HZ					
	Efficiency (Typ)	80%	81%				
	AC current (Typ)	0.57A/100V 0.23A/220V					
	Surge (Inrush) current (Typ)	Cold start: 65A/230VAC					
	Leakage Current	<2mA/240VAC					
Protection	Overload	>105% rated output power					
		Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	Over temperature	Overheat protection starts when temperature in transistor over 140℃ Recovers automatically after temperature is normal.					
Environment	Working temp.	-20~+50℃(Please refer to the attenuation curve)					
	Working humidity	20~90% RH,Non-condensing					
	Storage temp & hmdty	-40~+80℃					
	Temp. coefficient	±0.03%/℃ (0~50℃)					
	Vibration proof	10~500HZ,5G 10min/1 cycle, period for 60min. each along X、Y、Z axes					
Safety reg. & EMC (Note.6)	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)					
	Voltage proof	I/P-O:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	Isolation resistance	I/P-O/P, I/P-FG,O/P-FG:100M Ohms/500VDC/25℃/70% RH					
	EMC irradiation	EN 55022A:2006;EN61000-3-2:1995+A2:2005					
	EMC disturbance proof	EN 61000-3-2:2006;					
Others	Dimensions	115x40x25mm(L*W*H)					
	Packing	0.14kg/PCS;150PCS/20.55kg					
Remark	1. Unless specially indicated, all data are taken under 230VAC input, rated load and 25℃ environment temp. 2. Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1μF and a 47 μF capacitor on 20MHz bandwidth. 3. Tolerance(Accuracy): including preset errors, linear adjustment rate and load adjustment rate. 4. Linear adjustment: taken under rated load from low voltage to high voltage. 5. Load adjustment: taken under 0~100% of rated load. 6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments for EMC.						

36W STNADARD SWITCHING POWER SUPPLY SINGLE OUTPUT


■ Appearance

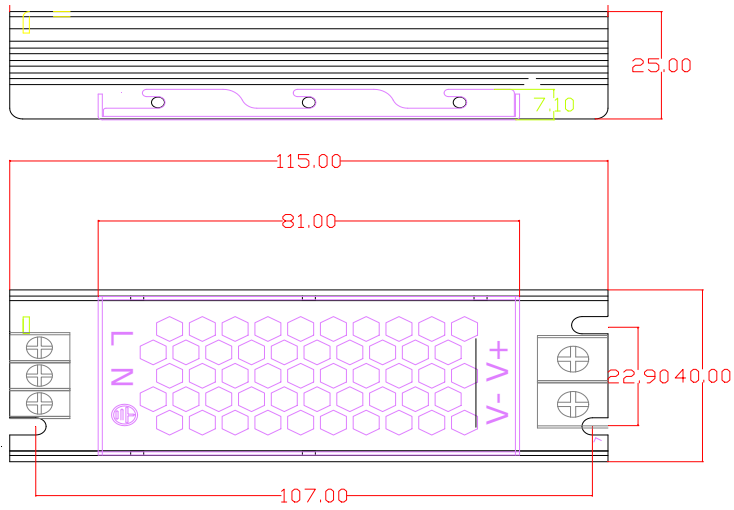


Definitionn the pin of the terminal

Pin number	Pin function
1	FG
2	AC/L
3	AC/N
4	OUTPUT +
5	OUTPUT -

■ Frame diagram

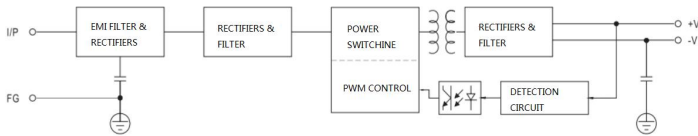

■ Derating curve

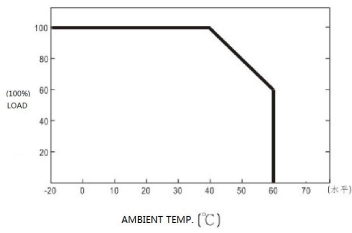

■ Static Characteristics

