



## 360W STANDARD SWITCHING POWER SUPPLY DOUBLE OUTPUT



(Dimension)

L:210 mm

W:81 mm

H:30mm

Weight: 0.52Kg

### ■Applications

- .Industrial automation machinery
- .Mechanical,electrical equipment
- .LED slim lighting equipment
- .IT communication equipment
- .Aging equipment

### ■Features

- Over-load,Over-temp. protection
- cooling by free air convection
- LED power indicator
- 100% full load burn-in test
- No-load consumption <0.7W
- Withstand 300VAC surge input for 5 seconds
- Working temperature up to 60°C
- 5G vibration tested
- High efficiency,long life,high reliability
- 2 years warranty




### Specifications

Product No.		SLC-360-12	SLC-360-24				
Output	DC voltage	12V	24V				
	Rated Current	30A	15A				
	Current Range	0-30A	0-15A				
	Rated Power	360W	360W				
	Ripple and Noise(Max)Note.2	150mVp-p	240mVp-p				
	Voltage adjustment	10.8-13.2V	22-27.6V				
	Voltage tolerance Note3	±1%	±1%				
	Linear Regulation Note4	±0.5%	±0.5%				
	Load Regulation Note5	±0.5%	±0.5%				
	Setup and rise time	1000ms,30ms/230VAC					
Hold up time (Typ)	50ms/230VAC 10ms/115AC						
Input	Voltage range	AC 220±15%					
	Frequency range	50HZ/60HZ					
	Efficiency (Typ)	86%	88%				
	AC current (Typ)	3.2A/220V					
	Surge (Inrush) current (Typ)	Cold start: 65A/230VAC					
	Leakage Current	<2mA/240VAC					
Protection	Overload	>105% rated output power					
		Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	Over temperature	Overheat protection starts when temperature in transistor over 140°C					
	Recovers automatically after temperature is normal.						
Environment	Working temp.	-20~+50°C (Please refer to the attenuation curve)					
	Working humidity	20~90% RH, Non-condensing					
	Storage temp & hmdty	-40~+80°C					
	Temp. coefficient	±0.03%/°C (0~50°C)					
	Vibration proof	10~500HZ,5G 10min/1 cycle, period for 60min, each along X、Y、Z axes					
Safety reg. & EMC (Note.6)	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)					
	Voltage proof	I/P-O:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	Isolation resistance	I/P-O/P, I/P-FG,O/P-FG:100M Ohms/500VDC/25°C/70% RH					
	EMC irradiation	EN 55022A:2006;EN61000-3-2:1995+A2:2005					
	EMC disturbance proof	EN 61000-3-2:2006;					
Others	Dimensions	210*81*30(L*W*H)					
	Packing	0.48kg/PCS;30PCS/14.4kg					
Remark	1. Unless specially indicated, all data are taken under 230VAC input, rated load and 25°C environment temp.						
	2.Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1μF and a 47 μF capacitor on 20MHz bandwidth.						
	3.Tolerance(Accuracy): including preset errors, linear adjustment rate and load adjustment rate.						
	4.Linear adjustment: taken under rated load from low voltage to high voltage.						
	5.Load adjustment: taken under 0~100% of rated load.						
	6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments for EMC.						

# 360W STANDARD SWITCHING POWER SUPPLY SINGLE OUTPUT


## ■ Appearance

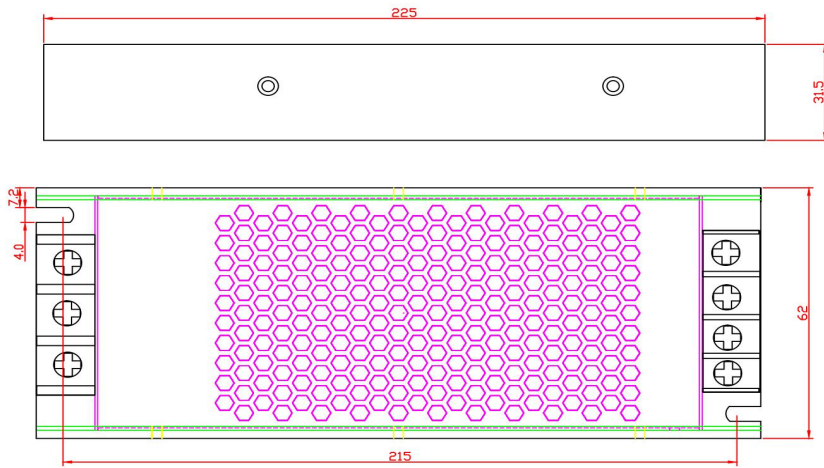


Definitionn the pin of the terminal

Pin number	Pin function
1	OUTPUT-
2	OUTPUT-
3	OUTPUT+
4	OUTPUT+
1	FG
2	AC/N
3	AC/L

## ■ Frame diagram

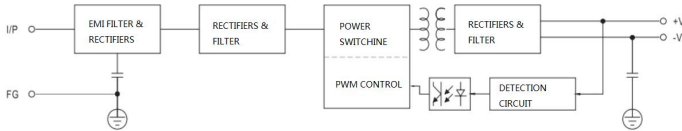

## ■ Derating curve



## ■ Static Characteristics

