



320W NON-WATERPROOF SWITCHING POWER SUPPLY SINGLE OUTPUT

SLR-320 series



(Dimension)

L:222 mm

W:68 mm

H:40mm

Weight: 0.55Kg



Applications

- .Industrial automation machinery
- .Mechanical,electrical equipment
- .LED slim lighting equipment
- .IT communication equipment
- .Aging equipment




Features

- .Over-load,Over-voltage,Over-temperature
- .cooling by free air convection
- .100% full load burn-in test
- .Withstand 300VAC surge input for 5s
- .No-load consumption<0.7W
- .Working temperature up to 60°C
- .High efficiency,long life,high reliability
- .5G vibration tested
- 2 years warranty
- LED indicator light

Specification

Product No.		SLR-320-12	SLR-320-24
Output	DC voltage	12V	24V
	Rated Current	26.6A	13.3A
	Current Range	0-26.6A	0-13.3A
	Rated Power	320W	320W
	Ripple and Noise(Max)Note.2	150mVp-p	240mVp-p
	Voltage adjustment	10.8-13.2V	22-27.6V
	Voltage tolerance Note3	±1%	±1%
	Linear Regulation Note4	±0.5%	±0.5%
	Load Regulation Note5	±0.5%	±0.5%
	Setup and rise time	1000ms,30ms/230VAC 1000ms,30ms/110V	
Hold up time (Typ)	50ms/230VAC 10ms/115AC		
Input	Voltage range	176-264AC	
	Frequency range	50HZ/60HZ	
	Efficiency (Typ)	70%	80%
	AC current (Typ)	6.6A/110V 3.3A/220V	
	Surge (Inrush) current (Typ)	Cold start: 65A/230VAC	
	Leakage Current	<2mA/240VAC	
Protection	Overload	>105% rated output power Protection type: Hiccup mode, recovers automatically after fault condition is removed	
	Over voltage	13.8V-16V	28V-32V
	Over temperature	Protection type: Recovers again by hand after close the output voltage	
		Overheat protection starts when temperature in transistor over 140°C Recovers automatically after temperature is normal.	
Environment	Working temp.	-20~+60°C	
	Working humidity	20~90% RH, Non-condensing	
	Storage temp & hmdty	-40~+80°C	
	Temp. coefficient	±0.03%/°C (0~50°C)	
	Vibration proof	10~500HZ,5G 10min/l cycle, period for 60min. each along X、Y、Z axes	
Safety reg. & EMC (Note.6)	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)	
	Voltage proof	I/P-O:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
	Isolation resistance	I/P-O/P, I/P-FG,O/P-FG:100M Ohms/500VDC/25°C/70% RH	
	EMC irradiation	EN 55022A:2006;EN61000-3-2:1995+A2:2005	
	EMC disturbance proof	EN 61000-3-2:2006;	
Others	Dimensions	222x68x40mm(L*W*H)	
	Packing	0.55kg/PCS;30PCS/16.5kg	
Remark	1. Unless specially indicated, all data are taken under 230VAC input, rated load and 25°C environment temp.		
	2.Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1μF and a 47 μF capacitor on 20MHz		
	3.Tolerance(Accuracy): including preset errors, linear adjustment rate and load adjustment rate.		
	4.Linear adjustment: taken under rated load from low voltage to high voltage.		
	5.Load adjustment: taken under 0~100% of rated load.		
	6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments for EMC.		


■ Appearance

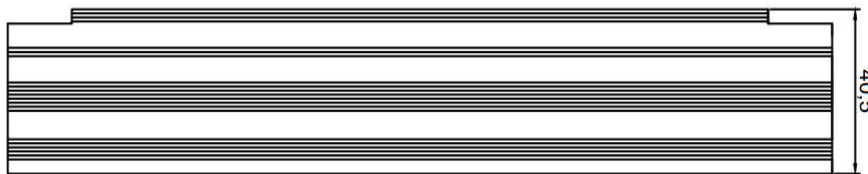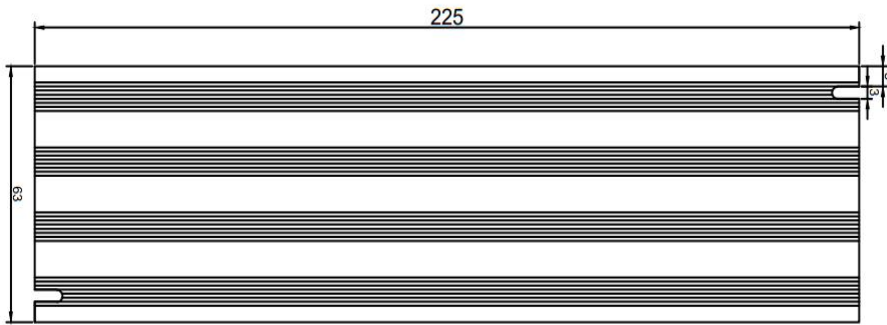


端子台脚位定义

引脚编号	引脚功能
1	FG
2	AC/L
3	AC/N
4	OUTPUT-
5	OUTPUT-
6	OUTPUT+
7	OUTPUT+

■ Frame diagram

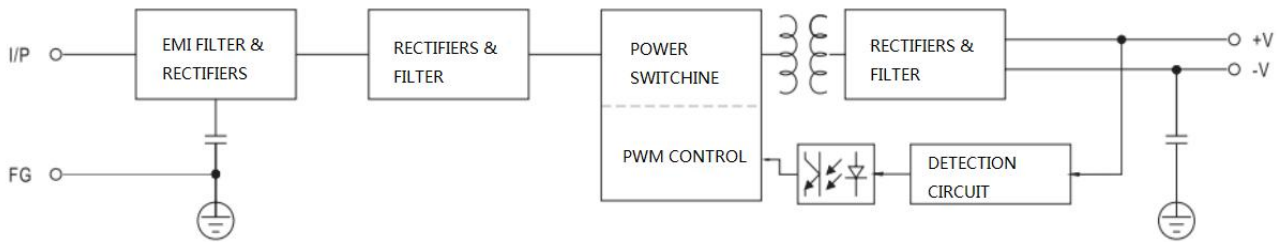

■ Derating curve

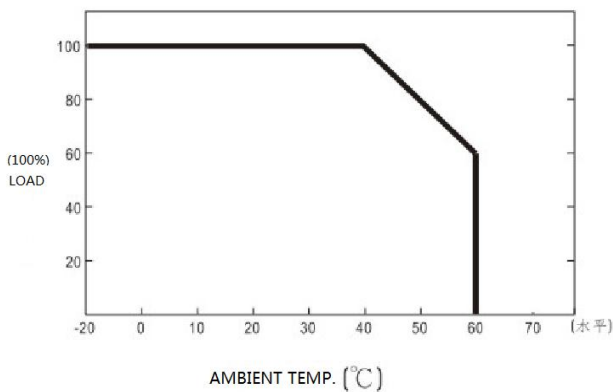

■ Static Characteristics

