



360W LED POWER SUPPLY SINGLE OUTPUT

SIZE:
L:215mm
W:115mm
H:30mm



- AC input: 110/220V
- Protection: short-circuit, overload, over voltage, over temperature
- 100% full-load aging test
- 300VAC surge for 5 seconds withstandable
- Working temperature up to 60°C
- 5G vibration tested
- High efficiency, long life span, and high reliability, low cost
- IP20 grade
- 3 years warranty

■Application


- *Industrial automation machinery
- *industrial control system
- *LED lighting
- *Mechanical and electrical equipment
- *Electronic instruments, equipments or apparatus



Specifications

Product No.		NWS-200-12	NWS-200-24
Output	DC voltage	12V	24V
	Rated Current	16.5A	8.3A
	Current Range	0-16.5A	0-8.3A
	Rated Power	200W	200W
	Ripple and Noise(Max)Note.2	150mVp-p	240mVp-p
	Voltage adjustment	10.8-13.2V	22-27.6V
	Voltage Accuracy Note3	±1%	±1%
	Linear Adjustment Note4	±0.5%	±0.5%
	Load Adjustment Note5	±0.5%	±0.5%
	Start and rise time	1000ms,30ms/230VAC 1000ms,30ms/110V	
Hold time (Typ)	50ms/230VAC 10ms/115AC		
Input	Voltage range	AC 110V±15%/AC 220±15% changed by switch	
	Frequency range	50HZ/60HZ	
	Efficiency (Typ)	80%	82%
	AC current (Typ)	3.7A/110V 1.8A/220V	
	Surge current (Typ)	Cold Start: 65A/230VAC	
	Current leak	<2mA/240VAC	
Protection	Overload	Larger than 105% of capacity restoration after abnormality removed	
	Overvoltage		
	Overheat		
Environment	Working temp.	-20~+60°C(Refer to the tenuation curve)	
	Working humidity	20~90% RH, without condense	
	Storage temp & hmdty	-40~+80°C	
	Temp. coefficient	±0.03%/°C (0~50°C)	
	Vibration proof	10~500HZ,5G 10min / cycle, X、Y、Z axes 60 min each	
Safety reg. & EMC (Note.6)	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)	
	Voltage proof	I/P-O/P:1.5KVAC	
	insulation resistance	I/P-O/P:100M Ohms/500VDC/25°C/70% RH	
	EMC irradiation	EN 55015:2006;EN61000-3-2:1995+A2:2005	
	EMC disturbance proof	EN 61000-3-2:2006;	
Dimensions	Dimensions	214*114*30mm(L*W*H)	
	Packing	0.59kg/PCS;32PCS/18.94kg	
Notes:	1. Unless specially indicated, all data are taken under 230VAC input, rated load and 25°C environment temp. 2. Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1μF and a 47 μF capacitor on 20MHz bandwidth. 3. Accuracy: including preset errors, linear adjustment rate and load adjustment rate. 4. Linear adjustment: taken under rated load from low voltage to high voltage. 5. Load adjustment: taken under 0~100% of rated load. 6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments for EMC.		


■Appearance

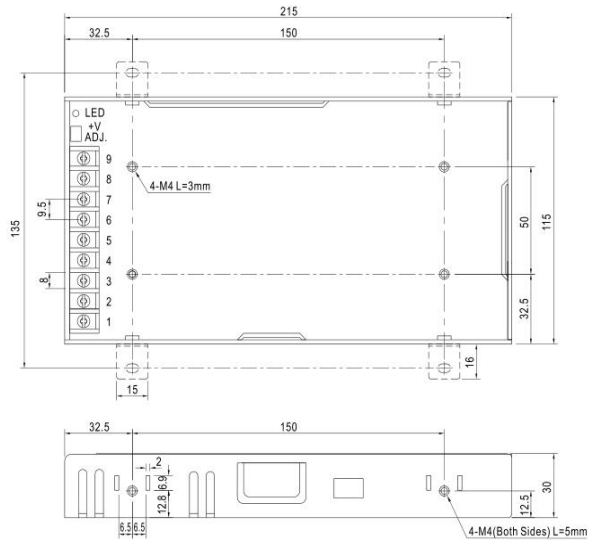

Terminal foot definition

Foot No.	
1	
2	
3	
4	
5	
6	
7	
8	
9	

■Frame diagram

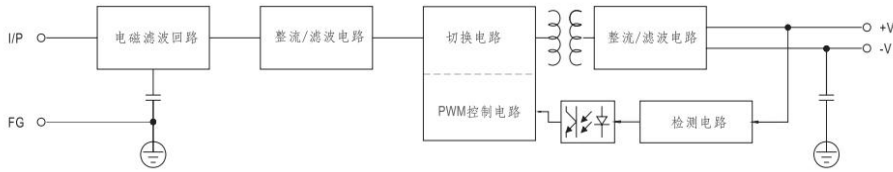

■Tenuation curve

